
# HAIKU

Enjoy the perfect blend of form and function with the expertly crafted Haiku from Big Ass Fans. With advanced features including automated SenseME™ technology, eight premium finishes, and available LED downlight and color-changing Chromatic Uplight, Haiku offers an unprecedented level of style, comfort, and control. Make the most of your favorite indoor and covered outdoor spaces with the whisper-quiet operation and world-class airflow from the world's most efficient smart fan.

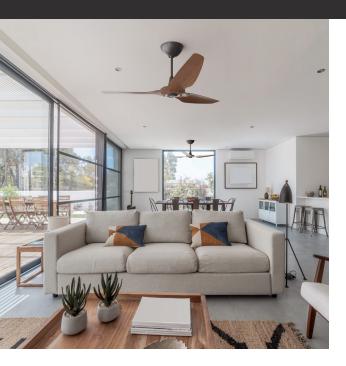

# **KEY FEATURES**

- Three precision-balanced airfoils in Moso bamboo or aircraft-grade aluminum
- Built-in SenseME™ technology for automated convenience and efficiency
- **LED** downlight and Chromatic Uplight with optional UV-C available together or separately
- **Permanent-magnet motor** for whisper-quiet, energy-efficient airflow
- Superior airflow control with bluetooth remote, seven speed settings, mobile app, and more
- Indoor and covered outdoor models available

## DIAMETER - 1

52, 60, 84 IN (132, 152, 213 CM)

# — MOUNTING .

- UNIVERSAL
- LOW PROFILE

### CONTROL.

- BLUETOOTH REMOTE - 0-10V
- MOBILE APP - VOICE INTEGRATION
  - OPTIONAL WIRED WALL CONTROL

### WARRANTY-

**5 YEARS** INDOOR

**3 YEARS** OUTDOOR



# **DISCOVER MORE ABOUT HAIKU**

Learn more at bigassfans.com/fans/haiku/ or call our comfort experts for a free custom quote.

# **HAIKU**

THE WORLD'S SMARTEST FAN JUST GOT BRIGHTER.



# Airfoil Finishes













# **Hardware Finishes**









Construction Features										
Airfoils	Motor <sup>1</sup>	Controls <sup>2</sup>	Onboard Sensors <sup>3</sup>	Mounting	Environment <sup>4</sup>	Accessories				
Bamboo (indoor only) or aircraft-grade aluminum	High-efficiency, brushless DC/EC motor Fan Eco Mode	Bluetooth remote Big Ass Fans mobile app Voice control 0–10 V (optional)	Temperature, humidity, and motion sensors enable SenseME Technology	Flat or sloped ceilings 8 ft (2.4 m) or taller Maximum slope: 33°	Indoor or covered damp locations	Haiku Light Kit Chromatic Uplight (indoor only) UV-C Uplight (indoor only) 0–10 V Module Extended downrod lengths Stabilizer Kit				

Ordering Information										
Diameter	Environment and Mounting 5,6	Airfoil Material	Hardware Finish	Airfoil Finish <sup>7</sup>	Region	Downrod	Downlight	Uplight <sup>6</sup>		
52 inch: MK-HK4-04 60 inch: MK-HK4-05 84 inch: MK-HK4-07	Indoor, Universal: 1806 Damp, Universal: 1906		Black: A258 White: A259 Satin Nickel: A470 Oil-Rubbed Bronze: A471	Black: F258 White: F259 Caramel Bamboo <sup>7</sup> : F221	US, CA, MX: Blank Europe: R01 APAC: R03 GCC: R04	12 inch: I12 20 inch: I20 32 inch: I32 Low Profile: Blank	Downlight: S2 None: Blank	Uplight: S80 None: Blank		
		Aluminum: Blank Bamboo: 01		Cocoa Bamboo <sup>7</sup> : F222 Caramel Wood Grain: F504 Cocoa Wood Grain: F654 Driftwood: F772 Satin Nickel: F470						
	Samp, Oniversal, 2300			Oil-Rubbed Bronze: F471 Brushed Aluminum: F531						







#### **Bluetooth Remote**







Magnetic Wall Holder

Handheld Remote

Lead times may vary.


Warranty period and terms vary by country and application.



# **HAIKU**

THE WORLD'S SMARTEST FAN JUST GOT BRIGHTER.





8.7 in. (221 mm)

**Low Profile Mount** 

**Universal Mount** 

Universal Mount Downrod Lengths										
Downrod (A) <sup>1</sup>	Included Do	ownrod (Select at Tin	ne of Order)	Optional Downrods (Ordered Separately)						
Downloa (A)	12 in. (305 mm)	20 in. (508 mm)	32 in. (813 mm)	7 in. (178 mm)	48 in. (1219 mm)	60 in. (1524 mm)				
Fan Height (B) <sup>2</sup>	21 in. (533 mm)	29 in. (737 mm)	41 in. (1041 mm)	16 in. (406 mm)	57 in. (1448 mm)	69 in. (1753 mm)				
Ceiling Height	9-10.5 ft (2.7-3.2 m)	10.5-11 ft (3.2-3.4 m)	11–13 ft (3.4–4 m)	9-11 ft (2.7-2.9 m)	13-14 ft (4-4.3 m)	>14 ft (>4.3 m)				

Fan Specifications — Aluminum Airfoils											
Diameter	Mount	Weight <sup>3</sup>	Max Speed	Airflow Min/Max	Watts Min/Max	Operating Voltage	Ambient Operational Temperature	Sound Level⁴			
52 in.	Low Profile	16.5 lb (7.5 kg)	177 RPM	427 / 5,084 cfm	2.4 / 14.6 W	100–240 VAC, 1 Ф, 50–60 Hz	32° to 104° F (0° to 40° C)	<35 dba at max speed			
(132 cm)	Universal	15.5 lb (7 kg)	199 RPM	342 / 6,207 cfm	2.5 / 19.4 W						
60 in.	Low Profile	18.5 lb (8.4 kg)	174 RPM	403 / 5,971 cfm	2.4 / 15.8 W						
(152 cm)	Universal	17.5 lb (8 kg)	199 RPM	509 / 7,366 cfm	2.5 / 21.3 W						
84 in. (213 cm)	Universal	26 lb (11.8 kg)	133 RPM	2,768 / 17,747 cfm	2.7 / 46.6 W						

Fan Specifications — Bamboo Airfoils⁵											
Diameter	Mount	Weight <sup>3</sup>	Max Speed	Airflow Min/Max	Watts Min/Max	Operating Voltage	Ambient Operational Temperature	Sound Level <sup>4</sup>			
52 in.	Low Profile	14 lb (6.4 kg)	177 RPM	331 / 5,590 cfm	2.4 / 20 W	- 100–240 VAC, 1 Φ, 50–60 Hz	32° to 104° F (0° to 40° C)	<35 dba at max speed			
(132 cm)	Universal	13 lb (5.9 kg)	199 RPM	371 / 6,786 cfm	3.5 / 23.2 W						
60 in.	Low Profile	16 lb (7.3 kg)	175 RPM	479/6,256 cfm	2.3/15.6 W						
(152 cm)	Universal	15 lb (6.8 kg)	199 RPM	596/7,572 cfm	2.6/21.4 W						
84 in. (213 cm)	Universal	21 lb (9.5 kg)	135 RPM	2,279 / 15,716 cfm	2.7 / 38.1 W						















#### Automate your comfort with SenseME

SenseME automatically adjusts your fans and lights to keep your home feeling and looking exactly the way you want it to. Download the Big Ass Fans mobile app to group multiple fans and set your comfort preferences for hands-free control.

- Optional downrod lengths packaged separately. The 7 in. (178 mm) downrod is not available for 84-inch (2134 mm) fans. 60 in. (1524 mm) is the longest downrod available.
  Fan heights do not include the Haiku Light kit. Add 0.8 in. (20 mm) for 84-inch (2134 mm) diameter fans.
  The precise fan weight will vary based on individual component weights and finishing.
  A ctual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.
  Bamboo airfolis must be installed in indoor, dry environments only.

Lead times may vary.

Warranty period and terms vary by country and application.

