

BIG ASS FANS® TURBO6

Turbo6 raises the roof on outdoor ceiling fans by delivering nearly double the airflow of a typical outdoor fan. Hotter days call for an immediate punch of cooling air delivered by a first-of-its-kind Kick Ass™ mode. Powerful airflow to beat the heat is now in the palm of your hand.



KEY FEATURES

- ▶ **Highest performing airflow** delivered to a larger coverage area thanks to a tilted blade profile.
- ▶ **Brushless motor technology** delivers seven speed settings plus Kick Ass mode which provides industry-leading performance with the tap of a finger.
- ▶ **Six aircraft-grade aluminum airfoils** for durability in outdoor settings.
- ▶ **Damp-rated for covered outdoor spaces** available in two sleek finishes.
- ▶ **The best protection** with industry-leading 3-year warranty.
- ▶ **Bluetooth wall control, handheld remote, mobile app, and voice integration** compatible with Amazon Alexa and Google Assistant.

DIAMETER

60, 72, AND 84 INCHES
(152, 183, AND 213 CM)

MOUNTING

UNIVERSAL

CONTROL

- BLUETOOTH REMOTE
- BLUETOOTH WALL CONTROL
- MOBILE APP
- VOICE INTEGRATION

WARRANTY

3 YEARS




**COMFORT WITHOUT
COMPROMISE**

**DISCOVER MORE
ABOUT TURBO6**

Learn more at bigassfans.com/turbo6
or call **877.BIG.FANS** for a free custom quote.

BIG ASS FANS® TURBO6

KICK HEAT'S ASS WITH OUR HIGHEST-PERFORMING FAN

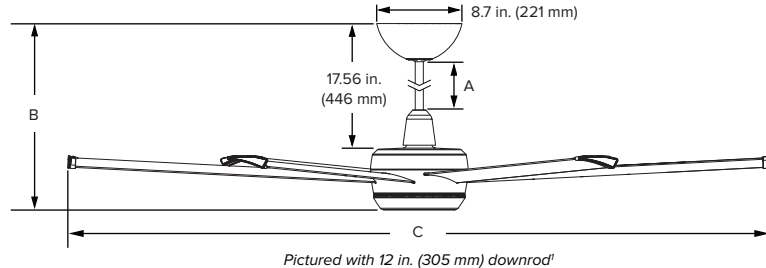


Downrod Lengths					
Downrod (A) ¹	12 in. (305 mm)	20 in. (508 mm)	32 in. (813 mm)	48 in. (1219 mm)	60 in. (1524 mm)
Fan Height (B)	24 in. (610 mm)	32 in. (813 mm)	44 in. (1118 mm)	60 in. (1524 mm)	72 in. (1829 mm)
Ceiling Height	9–10 ft (2.7–3 m)	10–13 ft (3–4 m)	13–14 ft (4–4.3 m)	14–16 ft (4.3–4.9 m)	16–18 ft (4.9–5.5 m)

Technical Specifications									
Diameter (C)	CFM ²	Efficiency (CFM/W) ²	Max Watts	Max Speed ²	Input Power	Packaged Dimensions and Weight	Fan Weight ³	Environment ⁴	Sound Level ⁵
60 in. (152 cm)	10,544 CFM	260	55 W	175 RPM	100–240 VAC, 50/60 Hz, 1 ϕ	37.1 in. L x 13.8 in. W x 13.7 in. H (943 mm L x 351 mm W x 348 mm H) 35.4 lb (16.1 kg)	24.5 lb (11.1 kg)	Indoor Covered outdoor (inland)	<35 dba at max speed
72 in. (183 cm)	14,033 CFM	305	66 W	140 RPM		37.1 in. L x 13.8 in. W x 13.7 in. H (943 mm L x 351 mm W x 348 mm H) 37 lb (16.8 kg)	26.4 lb (12 kg)		
84 in. (213 cm)	18,160 CFM	359	66 W	115 RPM		43.1 in. L x 13.8 in. W x 13.7 in. H (1095 mm L x 351 mm W x 348 mm H) 40.6 lb (18.4 kg)	28.2 lb (12.8 kg)		

Construction Features						
Airfoils	Motor and Hub	Controls	Onboard Sensors	Integrations ⁶	Mounting	Accessories
Made from aircraft-grade aluminum Tilted blade profile for maximum coverage area	High-efficiency, brushless DC/EC motor	Handheld remote Mobile app with Kick Ass™ mode Bluetooth wall control Voice control 0–10 V	Temperature and humidity sensors enable automatic fan speed adjustment	Voice control with Google Assistant or Amazon Alexa	Indoor: Flat or sloped ceilings 9 ft (2.7 m) or taller Maximum slope: 34° Outdoor: Flat ceilings 9 ft (2.7 m) or taller	Bluetooth wall control 0–10 V module Extended length downrods

Ordering Information		
Diameter	Finish	Downrod ¹
MK-TRB1-052306: 60 in. (152 cm) MK-TRB1-062306: 72 in. (183 cm) MK-TRB1-072306: 84 in. (213 cm)	A786: Black A786F736: Black and Brushed Silver	I12: 12 in. (305 mm) I20: 20 in. (508 mm) I32: 32 in. (813 mm)

Finish Options

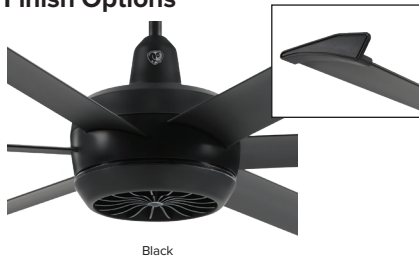

Remote



Lead times may vary. See full warranty for coverage information.



USA
BIGASSFANS.COM
877-244-3267

CANADA
BIGASSFANS.COM
844-924-4277

AUSTRALIA
BIGASSFANS.COM/AU
1300 244 277

SINGAPORE
BIGASSFANS.COM/SG
65 6709 8500